


Gessco™ 151*

Product Data Sheet

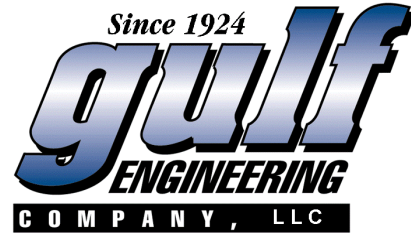

Product Type	Boiler water oxygen scavenger												
Description	Sulfite and bisulfite solution for oxygen scavenging												
Dosage	Typically 20 ppm of Gessco™ 151 per ppm of oxygen, depending on boiler pressure. For 0-300 psi, maintain 30-50 ppm sodium sulfite reserve; 300-600 psi, keep 20-40 ppm sodium sulfite; 600-900 psi, keep 10-20 ppm sodium sulfite reserve. Consult your Gessco™ representative or Service Technician for your situation. To measure sulfite levels use the Gessco™ 9600 Sulfite Drop Test Kit.												
Principal Users	Low- to medium-pressure boilers and pre-boilers operating up to 900 psi												
Features	<ol style="list-style-type: none">1) Eliminates the residual dissolved oxygen left by deaerators2) Fast-acting liquid formulation3) Solution does not easily freeze												
Characteristics	<table border="1"><tr><td>Physical form</td><td>Clear, colorless liquid</td></tr><tr><td>Density at 25C</td><td>1.26 (10.5 lbs/gal)</td></tr><tr><td>pH of product</td><td>6.0 – 6.5</td></tr><tr><td>Boiling Point</td><td>215°F (102°C)</td></tr><tr><td>Flash Point</td><td>Not flammable</td></tr><tr><td>Solubility</td><td>Completely water soluble</td></tr></table>	Physical form	Clear, colorless liquid	Density at 25C	1.26 (10.5 lbs/gal)	pH of product	6.0 – 6.5	Boiling Point	215°F (102°C)	Flash Point	Not flammable	Solubility	Completely water soluble
Physical form	Clear, colorless liquid												
Density at 25C	1.26 (10.5 lbs/gal)												
pH of product	6.0 – 6.5												
Boiling Point	215°F (102°C)												
Flash Point	Not flammable												
Solubility	Completely water soluble												
Precautions	Avoid inhalation of mists and contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Consult MSDS before handling.												
Packaging	The fourth digit of the product number designates the container size: Gessco™ 151-1 - 5 gallon polyethylene pail Gessco™ 151-2 - 30 gallon polyethylene drum Gessco™ 151-3 - 55 gallon polyethylene drum												

Robert Normand, Division Manager
Phone: (504) 602-1821
Email : robertn@gulfengr.com

Ashley Clement, Inside Sales Coordinator
Phone: (504) 602-1871
email: ashleyc@gulfengr.com

Gulf Engineering Co. LLC
611 Hill Street
P.O.Box 10067

Jefferson, LA 70181-0067

Toll Free : (800) 347-4749 FAX: (504) 734-0765