


Gessco™ 187*

Product Data Sheet

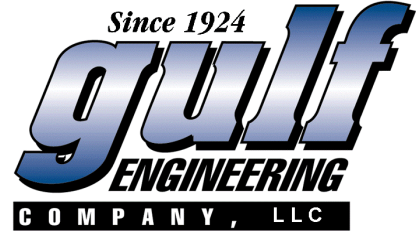

Product Type	Boiler water treatment												
Description	Multi-functional (one-drum) treatment for boiler water containing sludge conditioners, deposit control agents, anti-corrosion agents and condensate neutralization												
Dosage	Normally fed to maintain 20 - 40 ppm sodium sulfite in boiler water. Consult your Gessco™ representative or Service Technician for your situation.												
Principal Users	Boilers operating up to 800 psi												
Features	<ol style="list-style-type: none">1) Sludge conditioners to prevent deposits from forming2) Dispersant keeps hardness minerals from depositing3) Chelant keeps hardness minerals in soluble form4) Oxygen scavenger protects against corrosion5) Neutralizing amine goes into the vapor phase to protect the condensate line against corrosion6) Approved by FDA for food contact (other than milk and milk products) when the amine concentration in the steam is at 15 ppm or below.												
Characteristics	<table border="1"><tr><td>Physical form</td><td>Clear, brown liquid</td></tr><tr><td>Density at 25C</td><td>1.09 (8.5 lbs/gal)</td></tr><tr><td>pH of product</td><td>13.2</td></tr><tr><td>Boiling Point</td><td>215°F (102°C)</td></tr><tr><td>Flash Point</td><td>Not flammable</td></tr><tr><td>Solubility</td><td>Completely water soluble</td></tr></table>	Physical form	Clear, brown liquid	Density at 25C	1.09 (8.5 lbs/gal)	pH of product	13.2	Boiling Point	215°F (102°C)	Flash Point	Not flammable	Solubility	Completely water soluble
Physical form	Clear, brown liquid												
Density at 25C	1.09 (8.5 lbs/gal)												
pH of product	13.2												
Boiling Point	215°F (102°C)												
Flash Point	Not flammable												
Solubility	Completely water soluble												
Precautions	Danger! Corrosive. Causes severe digestive and respiratory tract burns. Causes severe eye and skin burns. Harmful if swallowed or inhaled. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Consult MSDS before handling.												
Packaging	The fourth digit of the product number designates the container size: Gessco™ 187-0 - 15 gallon polyethylene drum Gessco™ 187-1 - 5 gallon polyethylene pail Gessco™ 187-2 - 30 gallon polyethylene drum Gessco™ 187-3 - 55 gallon polyethylene drum Gessco™ 187-7 - 330 gallon polyethylene drum												

Gulf Engineering Co. LLC
611 Hill Street
P.O.Box 10067
Jefferson, LA 70181-0067

email: insidesales@gulfengineering.com

Toll Free: (800) 347-4749 FAX: (504) 734-0765