


Gessco™ 170*

Product Data Sheet

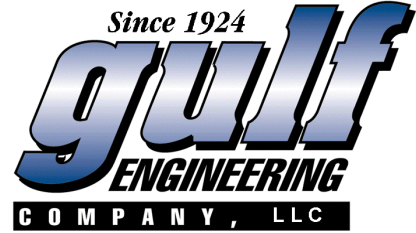

Product Type	Boiler water hardness remover										
Description	Blend of inorganic phosphates and specially processed organic dispersives										
Dosage	Depends on feedwater characteristics and equipment type. Consult your Gessco™ representative or Service Technician for your situation.										
Principal Users	Boilers operating up to 1200 psi										
Features	<ol style="list-style-type: none">1) Precipitates calcium and magnesium minerals so calcium and magnesium scales are prevented2) Improves boiler water quality3) Disperses solids that do form to resist scales and deposits4) Approved by FDA for uses where steam contacts food.										
Characteristics	<table border="1"><tr><td>Physical form</td><td>Gray to tan solid</td></tr><tr><td>Density</td><td>1.02 (89 lbs/cu. ft.)</td></tr><tr><td>pH of product</td><td>5.0 – 7.0</td></tr><tr><td>Flash Point</td><td>Not flammable</td></tr><tr><td>Solubility</td><td>Completely water soluble</td></tr></table>	Physical form	Gray to tan solid	Density	1.02 (89 lbs/cu. ft.)	pH of product	5.0 – 7.0	Flash Point	Not flammable	Solubility	Completely water soluble
Physical form	Gray to tan solid										
Density	1.02 (89 lbs/cu. ft.)										
pH of product	5.0 – 7.0										
Flash Point	Not flammable										
Solubility	Completely water soluble										
Precautions	Avoid inhalation of dust and contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Consult MSDS before handling.										
Packaging	The fourth digit of the product number designates the container size: Gessco™ 170-5 - 300 lbs in 32 gallon fiber drum										

Robert Normand, Division Manager
Phone: (504) 602-1821
Email : robertn@gulfengr.com

Ashley Clement, Inside Sales Coordinator
Phone: (504) 602-1871
email: ashleyc@gulfengr.com

Gulf Engineering Co. LLC
611 Hill Street
P.O.Box 10067

Jefferson, LA 70181-0067

Toll Free : (800) 347-4749 FAX: (504) 734-0765