


Gessco™ 173-5*

Product Data Sheet

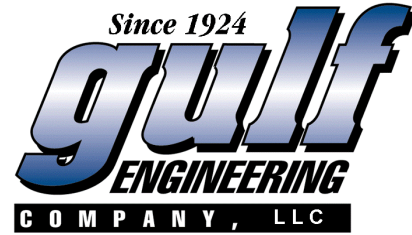

Product Type	Boiler water hardness remover												
Description	Blend of inorganic phosphates and specially processed organic dispersants												
Dosage	Varies with feedwater characteristics. Consult your Gessco™ representative or Service Technician for your situation.												
Principal Users	Boilers operating up to 800 psi												
Features	<ol style="list-style-type: none">1) Precipitates calcium and magnesium minerals so calcium and magnesium scales are prevented2) Improves boiler water quality3) Disperses solids that do form to resist scales and deposits4) Approved by FDA for uses where steam contacts food.												
Characteristics	<table border="1"><tr><td>Physical form</td><td>Tan granular solid</td></tr><tr><td>Density at 25C</td><td>2.5 (156 lbs/ft³)</td></tr><tr><td>pH of 1% solution</td><td>11.0</td></tr><tr><td>Boiling Point</td><td>NA</td></tr><tr><td>Flash Point</td><td>Not flammable</td></tr><tr><td>Solubility</td><td>Completely water-soluble</td></tr></table>	Physical form	Tan granular solid	Density at 25C	2.5 (156 lbs/ft ³)	pH of 1% solution	11.0	Boiling Point	NA	Flash Point	Not flammable	Solubility	Completely water-soluble
Physical form	Tan granular solid												
Density at 25C	2.5 (156 lbs/ft ³)												
pH of 1% solution	11.0												
Boiling Point	NA												
Flash Point	Not flammable												
Solubility	Completely water-soluble												
Precautions	Avoid inhalation of dust and contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Consult MSDS before handling.												
Packaging	The fourth digit of the product number designates the container size: Gessco™ 173-5 - 300 lbs in a 32-gallon fiber drum												

Gulf Engineering Co. LLC
611 Hill Street
P.O.Box 10067
Jefferson, LA 70181-0067

email: insidesales@gulfengineering.com

Toll Free: (800) 347-4749 FAX: (504) 734-0765