


Gessco™ 191*

Product Data Sheet

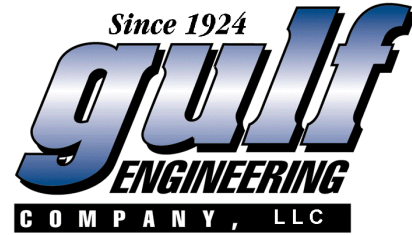

Product Type	Anti-foam agent												
Description	Non-ionic surfactant blend suitable for high-temperature aqueous conditions												
Dosage	Can be effective at 1 ppm in boiler water, but many variables affect results. Consult your Gessco™ representative or Service Technician for your situation.												
Principal Users	Boilers operating up to 1500 psi												
Features	<ol style="list-style-type: none">1) Lowers the surface tension of the boiler water so that foaming does not begin2) Good surface-spreading action attacks bubbles that do form3) Resists carryover in high-TDS situations even when foaming is not a problem4) Fights the foaming effects of degraded oils, fats, greases, metal oxides, silt and other impurities in boiler water5) Sufficient lifetime under hot, alkaline conditions to be very effective6) Approved by FDA for uses where steam contacts food.												
Characteristics	<table border="1"><tr><td>Physical form</td><td>Clear, colorless liquid</td></tr><tr><td>Density at 25°C</td><td>1.02 (8.5 lbs/gal)</td></tr><tr><td>pH of product</td><td>5.0 – 7.0</td></tr><tr><td>Boiling Point</td><td>212°F (100°C)</td></tr><tr><td>Flash Point</td><td>Not flammable</td></tr><tr><td>Solubility</td><td>Completely water-dispersible</td></tr></table>	Physical form	Clear, colorless liquid	Density at 25°C	1.02 (8.5 lbs/gal)	pH of product	5.0 – 7.0	Boiling Point	212°F (100°C)	Flash Point	Not flammable	Solubility	Completely water-dispersible
Physical form	Clear, colorless liquid												
Density at 25°C	1.02 (8.5 lbs/gal)												
pH of product	5.0 – 7.0												
Boiling Point	212°F (100°C)												
Flash Point	Not flammable												
Solubility	Completely water-dispersible												
Precautions	Avoid inhalation of mists and contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Consult MSDS before handling.												
Packaging	The fourth digit of the product number designates the container size: Gessco™ 191-1 - 5 gallon polyethylene pail Gessco™ 191-2 - 30 gallon polyethylene drum Gessco™ 191-3 - 55 gallon polyethylene drum												

Gulf Engineering Co. LLC
611 Hill Street
P.O.Box 10067
Jefferson, LA 70181-0067

email: insidesales@gulfengineering.com

Toll Free: (800) 347-4749 FAX: (504) 734-0765