


# Gessco™ 201 \*

## Product Data Sheet

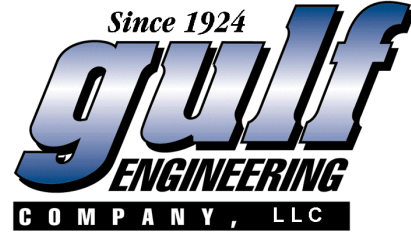

<b>Product Type</b>	Boiler condensate treatment (Return line treatment)												
<b>Description</b>	Neutralizing amine blend protecting condensate lines												
<b>Dosage</b>	Varies with carbonate and bicarbonate in feedwater. Typically 50-100 ppm in boiler water to achieve pH targets in condensate. Consult your Gessco™ representative or Service Technician for your situation.												
<b>Principal Users</b>	Boilers operating up to 1500 psi												
<b>Features</b>	<ol style="list-style-type: none"><li>1) Neutralizes acidic, corrosive products from CO<sub>2</sub> in condensate so that metal is not attacked.</li><li>2) Blend of two neutralizing amines protects short to medium length steam runs.</li><li>3) Provides corrosion protection throughout the steam system, condensate system and the boiler itself.</li><li>4) Contains a volatile oxygen scavenger to combat oxygen-induced corrosion (from dissolved air in feedwater or leaks) throughout the steam line, condensate line and boiler.</li></ol>												
<b>Characteristics</b>	<table border="1"><tr><td>Physical form</td><td>Clear pale yellow liquid</td></tr><tr><td>Density at 25C</td><td>1.02 (8.5 lbs/gal)</td></tr><tr><td>pH of product</td><td>11.2</td></tr><tr><td>Boiling Point</td><td>208°F (98°C)</td></tr><tr><td>Flash Point</td><td>100°F (38°C)</td></tr><tr><td>Solubility</td><td>Completely water-soluble</td></tr></table>	Physical form	Clear pale yellow liquid	Density at 25C	1.02 (8.5 lbs/gal)	pH of product	11.2	Boiling Point	208°F (98°C)	Flash Point	100°F (38°C)	Solubility	Completely water-soluble
Physical form	Clear pale yellow liquid												
Density at 25C	1.02 (8.5 lbs/gal)												
pH of product	11.2												
Boiling Point	208°F (98°C)												
Flash Point	100°F (38°C)												
Solubility	Completely water-soluble												
<b>Precautions</b>	<b>Flammable liquid.</b> Avoid proximity to sparks or flames. <b>Corrosive liquid.</b> Avoid inhalation and contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Consult MSDS before handling.												
<b>Packaging</b>	The fourth digit of the product number designates the container size: Gessco™ 201-1 - 5 gallon polyethylene pail Gessco™ 201-2 - 30 gallon polyethylene drum Gessco™ 201-3 - 55 gallon polyethylene drum												

Robert Normand, Division Manager  
Phone: (504) 602-1821  
Email : [robertn@gulfengr.com](mailto:robertn@gulfengr.com)

Ashley Clement, Inside Sales Coordinator  
Phone: (504) 602-1871  
email: [ashleyc@gulfengr.com](mailto:ashleyc@gulfengr.com)

Gulf Engineering Co. LLC  
611 Hill Street  
P.O.Box 10067

Jefferson, LA 70181-0067

Toll Free : (800) 347-4749 FAX: (504) 734-0765