


Gessco™ 240*

Product Data Sheet

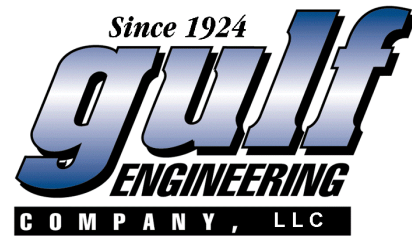

Product Type	Boiler condensate treatment (Return line treatment)												
Description	Filming amine blend protecting condensate lines												
Dosage	Typically 20-40 ppm in boiler water or aspirated into steam line. Consult your Gessco™ representative or Service Technician for your situation.												
Principal Users	Boilers operating up to 1200 psi												
Features	<ol style="list-style-type: none">1) Filming amine blend places a protective barrier on metal surface of steam and condensate lines.2) Provides corrosion protection throughout the steam system, condensate system and the boiler itself.3) Clean metal surfaces promote most efficient heat transfer.												
Characteristics	<table border="1"><tr><td>Physical form</td><td>Creamy pale yellow suspension</td></tr><tr><td>Density at 25C</td><td>0.98 (8.2 lbs/gal)</td></tr><tr><td>pH of product</td><td>12.0</td></tr><tr><td>Boiling Point</td><td>212°F (98°C)</td></tr><tr><td>Flash Point</td><td>Non-flammable</td></tr><tr><td>Solubility</td><td>Completely water-dispersible</td></tr></table>	Physical form	Creamy pale yellow suspension	Density at 25C	0.98 (8.2 lbs/gal)	pH of product	12.0	Boiling Point	212°F (98°C)	Flash Point	Non-flammable	Solubility	Completely water-dispersible
Physical form	Creamy pale yellow suspension												
Density at 25C	0.98 (8.2 lbs/gal)												
pH of product	12.0												
Boiling Point	212°F (98°C)												
Flash Point	Non-flammable												
Solubility	Completely water-dispersible												
Precautions	Corrosive liquid. Avoid inhalation and contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Consult MSDS before handling.												
Packaging	The fourth digit of the product number designates the container size: Gessco™ 240-1 - 5 gallon polyethylene pail Gessco™ 240-2 - 30 gallon polyethylene drum Gessco™ 240-3 - 55 gallon polyethylene drum												

Gulf Engineering Co. LLC
611 Hill Street
P.O.Box 10067
Jefferson, LA 70181-0067

email: insidesales@gulfengineering.com

Toll Free : (800) 347-4749 FAX: (504) 734-0765