


Gessco™ 308*

Product Data Sheet

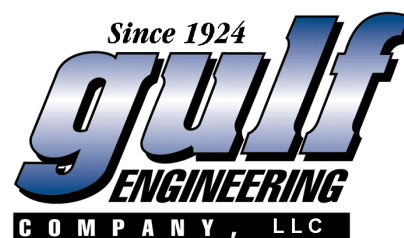

Product Type	Cooling tower water treatment												
Description	Scaling and corrosion inhibitor for high-silica feedwater												
Dosage	Typically 150 – 200 ppm in cycled up water, but feedwater quality and equipment specifics may indicate a higher or lower feed rate. Consult your Gessco™ representative or Service Technician for your situation. The preferred control method to conserve water and Gessco™ 308* is the use of conductivity-controlled feed and bleed equipment operating proportionately to system load.												
Principal Users	Air-conditioning towers, evaporative condensers, air wash and small open recirculating cooling systems												
Features	<ol style="list-style-type: none">1) Prevents silica and silicate scales on equipment with feedwater having up to 300 ppm silica2) Prevents scaling from hardness minerals that concentrate in the water by evaporation3) Prevents corrosion on carbon steel, stainless steel, copper, copper alloys, zinc, aluminum and other metals found in cooling systems4) Disperses solids from precipitated hardness minerals, atmospheric dirt and biomass so that they are discarded with the blowdown												
Characteristics	<table border="1"><tr><td>Physical form</td><td>Clear pale yellow liquid</td></tr><tr><td>Density at 25C</td><td>1.08 (9.1 lbs/gal)</td></tr><tr><td>pH of product</td><td>10.2</td></tr><tr><td>Boiling Point</td><td>215°F (102°C)</td></tr><tr><td>Flash Point</td><td>Non-flammable</td></tr><tr><td>Solubility</td><td>Completely water-soluble</td></tr></table>	Physical form	Clear pale yellow liquid	Density at 25C	1.08 (9.1 lbs/gal)	pH of product	10.2	Boiling Point	215°F (102°C)	Flash Point	Non-flammable	Solubility	Completely water-soluble
Physical form	Clear pale yellow liquid												
Density at 25C	1.08 (9.1 lbs/gal)												
pH of product	10.2												
Boiling Point	215°F (102°C)												
Flash Point	Non-flammable												
Solubility	Completely water-soluble												
Precautions	Corrosive liquid. Avoid contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Non-flammable, alkaline liquid. Consult MSDS before handling.												
Packaging	The fourth digit of the product number designates the container size: Gessco™ 308-0 - 15 gallon polyethylene drum Gessco™ 308-1 - 5 gallon polyethylene pail Gessco™ 308-2 - 30 gallon polyethylene drum Gessco™ 308-3 - 55 gallon polyethylene drum												

Gulf Engineering Co. LLC
611 Hill Street
P.O.Box 10067
Jefferson, LA 70181-0067

email: insidesales@gulfengineering.com

Toll Free : (800) 347-4749 FAX: (504) 734-0765