


# Gessco™ 620\*

## Product Data Sheet

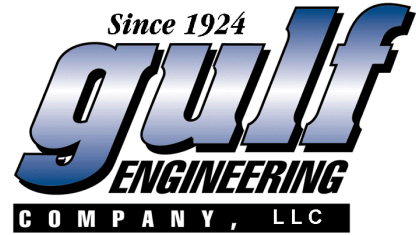

<b>Product Type</b>	Inhibited sulfamic acid descaler								
<b>Description</b>	Solid sulfamic acid descaler with corrosion inhibitor								
<b>Dosage</b>	6 – 8 oz (about 1 cup) Gessco™ 620 for each gal of water in the system								
<b>Principal Users</b>	Evaporators and cooling towers								
<b>Features</b>	<ol style="list-style-type: none"><li>1. Removes calcium carbonate and other hardness mineral scales</li><li>2. Low-foaming formulation</li><li>3. Inhibited to minimize metal removal</li><li>4. Unique indicator dye tells when the descaling capacity is exhausted.</li></ol>								
<b>Directions</b>	Add the calculated amount of product to clean water in the system through available openings. Circulate 8 – 12 hrs. Drain and rinse to remove loose material and excess cleaning product.								
<b>Characteristics</b>	<table border="1"><tr><td>Physical form</td><td>Dirty yellow granular solid</td></tr><tr><td>Density at 25C</td><td>2.1 (131 lbs/ft<sup>3</sup>)</td></tr><tr><td>pH (1% solution)</td><td>1.2</td></tr><tr><td>Solubility</td><td>Completely water-soluble</td></tr></table>	Physical form	Dirty yellow granular solid	Density at 25C	2.1 (131 lbs/ft <sup>3</sup> )	pH (1% solution)	1.2	Solubility	Completely water-soluble
Physical form	Dirty yellow granular solid								
Density at 25C	2.1 (131 lbs/ft <sup>3</sup> )								
pH (1% solution)	1.2								
Solubility	Completely water-soluble								
<b>Precautions</b>	Avoid contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Do not inhale dust. Consult MSDS before handling.								
<b>Packaging</b>	The fourth digit of the product number designates the container size: Gessco™ 620-4 - 100 lbs in a 10.5 gal fiber keg								

Gulf Engineering Co. LLC 611 Hill Street P.O.Box 10067 Jefferson, LA 70181-0067	email: <a href="mailto:insidesales@gulfengineering.com">insidesales@gulfengineering.com</a> Toll Free: (800) 347-4749 FAX: (504) 734-0765
--	--