


Gessco™ 620*

Product Data Sheet



Product Type	Inhibited sulfamic acid descaler								
Description	Solid sulfamic acid descaler with corrosion inhibitor								
Dosage	6 – 8 oz (about 1 cup) Gessco™ 620 for each gal of water in the system								
Principal Users	Evaporators and cooling towers								
Features	<ol style="list-style-type: none">1. Removes calcium carbonate and other hardness mineral scales2. Low-foaming formulation3. Inhibited to minimize metal removal4. Unique indicator dye tells when the descaling capacity is exhausted.								
Directions	<p>Add the calculated amount of product to clean water in the system through available openings. Circulate 8 – 12 hrs. Drain and rinse to remove loose material and excess cleaning product.</p>								
Characteristics	<table border="1"><tr><td>Physical form</td><td>Dirty yellow granular solid</td></tr><tr><td>Density at 25C</td><td>2.1 (131 lbs/ft³)</td></tr><tr><td>pH (1% solution)</td><td>1.2</td></tr><tr><td>Solubility</td><td>Completely water-soluble</td></tr></table>	Physical form	Dirty yellow granular solid	Density at 25C	2.1 (131 lbs/ft ³)	pH (1% solution)	1.2	Solubility	Completely water-soluble
Physical form	Dirty yellow granular solid								
Density at 25C	2.1 (131 lbs/ft ³)								
pH (1% solution)	1.2								
Solubility	Completely water-soluble								
Precautions	Avoid contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Do not inhale dust. Consult MSDS before handling.								
Packaging	The fourth digit of the product number designates the container size: Gessco™ 620-4 - 100 lbs in a 10.5 gal fiber keg								

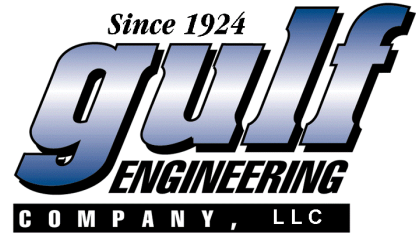

Gulf Engineering Co. LLC 611 Hill Street P.O.Box 10067 Jefferson, LA 70181-0067	email: insidesales@gulfengineering.com Toll Free: (800) 347-4749 FAX: (504) 734-0765
--	--