


Gessco™ 260*

Product Data Sheet

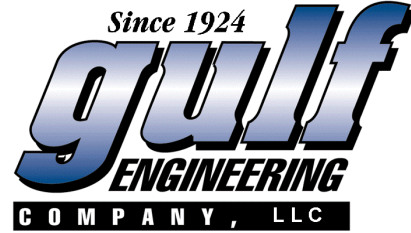

Product Type	Boiler condensate treatment (Return line treatment)												
Description	Neutralizing amine protecting condensate lines												
Dosage	Varies with carbonate and bicarbonate in feedwater. Typically 50-100 ppm in boiler water to achieve pH targets in condensate. Consult your Gessco™ representative or Service Technician for your situation.												
Principal Users	Boilers operating up to 1500 psi												
Features	<ol style="list-style-type: none">1) Neutralizes acidic, corrosive products from CO₂ in condensate so that metal is not attacked.2) Neutralizing amine protects short to medium length steam runs.3) Provides corrosion protection throughout the steam system, condensate system and the boiler itself.4) Approved by FDA for food contact (other than milk and milk products) when the amine concentration in the steam is at 15 ppm or below.												
Characteristics	<table border="1"><tr><td>Physical form</td><td>Clear pale yellow liquid</td></tr><tr><td>Density at 25C</td><td>0.98 (8.2 lbs/gal)</td></tr><tr><td>pH of product</td><td>12.4</td></tr><tr><td>Boiling Point</td><td>210°F (99°C)</td></tr><tr><td>Flash Point</td><td>125°F (52°C) Tag CC</td></tr><tr><td>Solubility</td><td>Completely water-soluble</td></tr></table>	Physical form	Clear pale yellow liquid	Density at 25C	0.98 (8.2 lbs/gal)	pH of product	12.4	Boiling Point	210°F (99°C)	Flash Point	125°F (52°C) Tag CC	Solubility	Completely water-soluble
Physical form	Clear pale yellow liquid												
Density at 25C	0.98 (8.2 lbs/gal)												
pH of product	12.4												
Boiling Point	210°F (99°C)												
Flash Point	125°F (52°C) Tag CC												
Solubility	Completely water-soluble												
Precautions	Flammable liquid. Avoid proximity to sparks or flames. Corrosive liquid. Avoid inhalation and contact with skin and eyes. Do not take internally. Keep from freezing. Keep out of reach of children. Goggles recommended when handling. Consult MSDS before handling.												
Packaging	The fourth digit of the product number designates the container size: CitRam™ -1 - 5 gallon polyethylene pail CitRam™ -2 - 30 gallon polyethylene drum CitRam™ -3 - 55 gallon polyethylene drum												

Gulf Engineering Co. LLC
611 Hill Street
P.O.Box 10067
Jefferson, LA 70181-0067

email: insidesales@gulfengineering.com

Toll Free : (800) 347-4749 FAX: (504) 734-0765